


## Specification




<b>Model:</b>	<b>ABAN-2030-COMPACT</b>
Frequency Range:	2000-3000MHz (any 300MHz within the range)
Pattern:	Co-linear Omni Directional
Gain:	6dB nominal (8dBi)
VSWR:	< 2.0:1 across the band
RF Power Handling:	25W
Polarization:	Linear Vertical
Mechanical Form:	Tube
Size:	350x22mm plus connector
Weight:	90g
Finish:	Matt Black (other colours available on request)
RF Connector:	N Type Male Straight
<b>Accessories:</b>	Sucker Mounts x2 for window mounting (Black) 200mm Gooseneck with Magnetic Mount Base 150mm diameter (all Black)

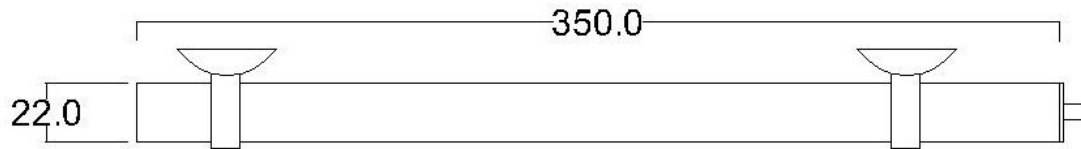

07/05/2014

ABER Electronics Ltd • Unit 9 • Bellhouse Farm • Church Lane • Colchester • Essex • CO3 8LS  
[www.aberelectronics.co.uk](http://www.aberelectronics.co.uk) TEL +44 (0)1206 617580  
ABER Electronics reserve the right to alter specs at any time as a result of ongoing product development.  
ABER ELECTRONICS LTD ARE ISO9001:2008 CERTIFIED

# Specification

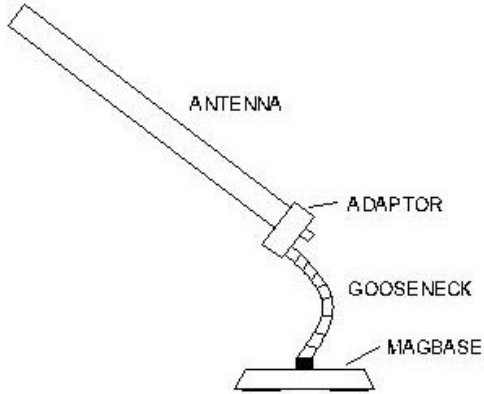


Antenna ABAN-2050-CL  
Adaptor 21188  
MagBase 21187  
Gooseneck GN200




Antenna ABAN-2050-CL  
Adaptor 21189  
Sucker Base 21190

## Alternative Window Mounting Base

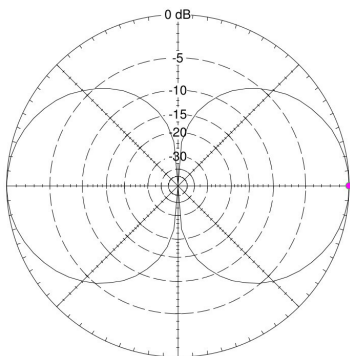

2050MHz Elevation Plot

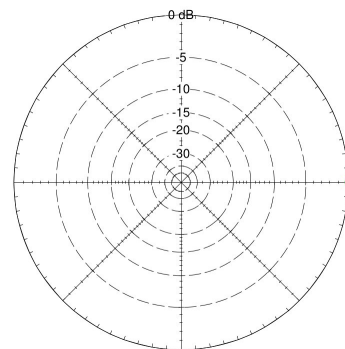

2050MHz Azimuth Plot

07/05/2014